

## Sealing Global Relationships



Wraptech Machines are Present in:

- |                |               |               |
|----------------|---------------|---------------|
| • U.S.A.       | • Ghana       | • Cameroon    |
| • U.K.         | • Uganda      | • Ethiopia    |
| • Australia    | • Tanzania    | • Yemen       |
| • Canada       | • Kuwait      | • Vietnam     |
| • Ireland      | • New Zealand | • Philippines |
| • U.A.E.       | • Mauritius   | • Chile       |
| • Singapore    | • Morocco     | • Bangladesh  |
| • Saudi Arabia | • Mozambique  | • Nepal       |
| • Malaysia     | • Algeria     | • Sri Lanka   |
| • Russia       | • Zambia      | • Congo       |
| • Nigeria      | • Malta       | • Albania     |
| • Kenya        |               |               |

**WP** Wraptech Machines Pvt. Ltd.

Plot No. D-273 & D-274, T.T.C. Industrial Area, M.I.D.C., Turbhe,  
Dist. Thane, Navi Mumbai - 400 705, INDIA.  
Tel.: 91-22-2761 4316, 2787 1743, 2768 8913 • Telefax: 91-22-2761 2807  
E-mail: abm@wrapmachines.com • marketing@wrapmachines.com  
www.wrapmachines.com



Due to continuous improvement, specifications are subject to change without prior notice.



# Wraptech Machines Pvt. Ltd.

## Horizontal Flow Wrap Machine

*Introducing*

*Horizontal Flow Wrap Machines for*

• High Output Speed • Value for Money • Reliability



# PACKAGING MACHINES

*Engineered to Excellence*

## TOP FILM LOADING ROTARY FLOW WRAP MACHINE



### Application

Application for packing various solid regular objects, such as Monocake, Bread, Biscuits, Candies, Rices Rispies Treats, Snow Cake Custard Cake Chocolates, Soaps, Detergents, Chikkies etc.

### Salient Features

- Dual frequency conversion control to cut bag length & set output speed in one step through PLC MMI, saving time and film
- Interface features are easy for quick setting and operation
- Self diagnosis failure function, with clear failure display.
- High Sensitivity photoelectric eye colour mark sensor
- Numerical input of cutting sealing position which makes the sealing and cutting more accurate.
- Independent PID Temperature control, more suitable for packing beautiful and tight sealing, suitable for a wide variety of flexible packaging material.

- Simple drive system, reliable working, convenient maintenance
- All the controls are realized through software, easy for function adjusting and technical upgradation.

### Optional Features

- Full SS construction
- Hot Roll type Batch Printer
- Ink felt type Batch Printer
- Nitrogen flushing attachment
- No Product- No pouch feature
- Material cut prevention devise
- Gusseting device with Single Jaw (Applicable for models WH 350 & WH 450 only)

### Technical Specification

Model No.	WH 250	WH 350	WH 450
Film Width	Max.250mm	Max. 350mm	Max. 450mm
Bag Length	90-220mm	80-300mm	120 - 450mm
Bag Width	30-110mm	30-160mm	50-180
Product Height	Max.55mm	Max. 55mm	Max. 65mm
Film Roll Dia.	320mm	300mm	300mm
Packaging Output	40-200 PPM	40-200 PPM	40-200 PPM
Packaging Materials	OPP, OPP/CPP, PT/PE, KOP/CPP, ALU-FILM		
Power (Single phase)	220V, 50/60Hz 2.4 Kw	220V, 50/60Hz 2.6Kw	220V, 50/60Hz, 3.0 Kw
Machine Size(mm)	3770(L) X 670(W) X1450(H)	4020(L) X 770(W) X 1450(H)	4120(L) X 920(W) X 1520(H)
Machine weight	About 700 Kg.	About 850 Kg.	About 900 Kg.

## BOTTOM FILM LOADING ROTARY FLOW WRAP MACHINE



### Applications

Applicable for packing various irregular objects, Adhesive objects and Solid objects, such as food including Egg Rolls, Sausages, Squids, Instant noodles, Snow cakes, Preserved Fruits, Jelly drops, Soaps, Detergents, Chikkies, Tissues etc.


### Salient Features

- Dual frequency conversion control to cut bag length & set output speed in one step through PLC MMI saving time and film
- Interface features are easy for quick setting and operation
- Self diagnosis failure function, with clear failure display.
- High sensitivity photoelectric eye colour mark sensor
- Numerical input of cutting sealing position which makes the sealing and cutting more accurate.

- Independent PID Temperature control, more suitable for packing beautiful and tight sealing, suitable for a wide variety of flexible packaging material.
- Simple driving system, reliable working, convenient maintenance
- All the controls are realized through software, easy for function adjusting and technical upgradation.

### Optional Features

- Full SS construction
- Hot Roll type Batch Printer
- Ink felt type Batch Printer
- Nitrogen flushing attachment
- No Product- No pouch feature
- Material cut prevention devise

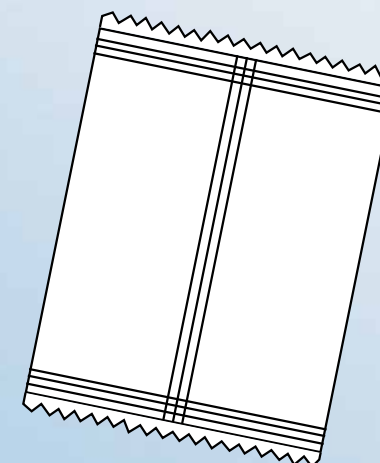

### Technical Specification:

Model No.	WH 220	WH 320
Film Width	Max. 220mm	Max. 320mm
Bag Length	65-160mm	80-240mm
Bag Width	30-100mm	50-150mm
Product Height	Max. 35mm	Max. 55mm
Film Roll Dia.	320mm	300mm
Packaging Output	35-180 PPM	35-180 PPM
Packaging Materials	OPP, OPP/CPP, PT/PE, KOP/CPP, ALU-FILM	
Power(Single phase)	220V, 50/60Hz 2.75Kw	220V, 50/60Hz 3.0Kw
Machine Size(mm)	4300(L) X 830(W) X1340(H)	4300(L) X 830(W) X 1340(H)
Machine weight	About 440 Kg.	About 680 Kg.